
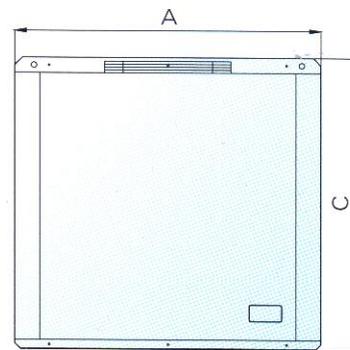


| 型号 Model | LYJ50LY-P | LYJ63LY-P | LYJ100LY-P | LYJ150LY-P | LYJ200LY-P | LYJ300LY-P | LYJ400LY-P |
|------------------------|--------------------------|-----------|------------|------------|------------|------------|------------|
| 制冷量(w) Capacity | 550 | 660 | 750 | 1050 | 1580 | 2060 | 3100 |
| 输入功率(kW) Input | 0.63 | 0.71 | 1.04 | 1.35 | 2.01 | 2.63 | 3.26 |
| 电源 Power supply | 220V/单相/50HZ | | | | | 380V /50HZ | |
| 适用温度(°C) Tem range | -15~ -20 | | | | | | |
| 冷凝风机(w) Cond fan | 1x75 | 1x75 | 1x80 | 1x80 | 1x155 | 1x155 | 2x80 |
| 蒸发风机(w) Evap fan | 1x75 | 1x75 | 1x80 | 1x80 | 1x155 | 1x155 | 2x80 |
| 除霜方式 Defrost type | 电热 Electrical heating | | | | | | |
| 节流形式 Expansion type | 膨胀阀 Expansion valve | | | | | | |
| 制冷剂 Refrigerant | R404A | | | | | | |
| 重量(kg) WT | 60 | 62 | 88 | 92 | 123 | 128 | 160 |

说明: LYJ××MY型机组标定工况为蒸发温度-7℃、冷凝温度45℃, LYJ××LY型机组标定工况为蒸发温度-25℃、冷凝温度45℃
 Note: The capacity test condition of LYJ××MY is: Te/Ta: -7℃/45℃. The capacity test condition of LYJ××LY is: Te/Ta: -25℃/45℃.

外形及安装尺寸 Overall and installation dimensions

1) 外形结构示意图 Overall sizes

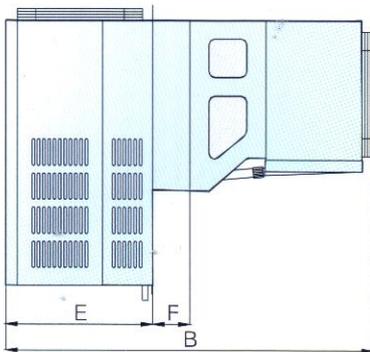

2) 安装及开孔示意图 Installation sizes

